

STP270 - 20/Wem
STP265 - 20/Wem
STP260 - 20/Wem

270 Watt
POLYCRYSTALLINE SOLAR MODULE



Features



High module conversion efficiency

Module efficiency up to 16.6% achieved through advanced cell technology and manufacturing capabilities



High PID resistant

Advanced cell technology and qualified materials lead to high resistance to PID



Positive tolerance

Positive tolerance of up to 5 W delivers higher output reliability



Suntech current sorting process

System output maximized by reducing mismatch losses up to 2% with modules sorted & packaged by amperage



Extended wind and snow load tests

Module certified to withstand extreme wind (3800 Pascal) and snow loads (5400 Pascal) *



Withstanding harsh environment

Reliable quality leads to a better sustainability even in harsh environment like desert, farm and coastline


Certifications and standards:
 IEC 61215, IEC 61730, conformity to CE



Trust Suntech to Deliver Reliable Performance Over Time


- World-class manufacturer of crystalline silicon photovoltaic modules
- Unrivaled manufacturing capacity and world-class technology
- Rigorous quality control meeting the highest international standards: ISO 9001: 2008, ISO 14001: 2004 and ISO17025: 2005
- Regular independently checked production process from international accredited institute/company
- Tested for harsh environments (salt mist, ammonia corrosion and sand blowing testing: IEC 61701, IEC 62716, DIN EN 60068-2-68)***
- Long-term reliability tests
- 2 x 100% EL inspection ensuring defect-free modules

Special 4 busbar design



The unique cell design leads tremendous reduction in electrodes resistance and raise in conversion efficiency. Less residual stress, less cell micro-cracks and hotspot risks.

Industry-leading Warranty based on nominal power

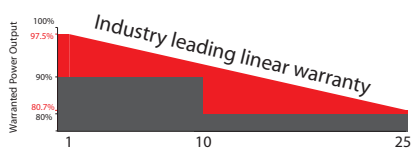

- 97.5% in the first year, thereafter, for years two (2) through twenty-five (25), 0.7% maximum decrease from MODULE's nominal power output per year, ending with the 80.7% in the 25th year after the defined WARRANTY STARTING DATE.****
- 12-year product warranty
- 25-year linear performance warranty

IP68 Rated Junction Box




The Suntech IP68 rated junction box ensures an outstanding waterproof level, supports installations in all orientations and reduces stress on the cables. High reliable performance, low resistance connectors ensure maximum output for the highest energy production.

* Please refer to Suntech Standard Module Installation Manual for details. **PV Cycle only for EU market.

*** Please refer to Suntech Product Near-coast Installation Manual for details. **** Please refer to Suntech Product Warranty for details.

STP270- 20/Wem
STP265 - 20/Wem
STP260 - 20/Wem

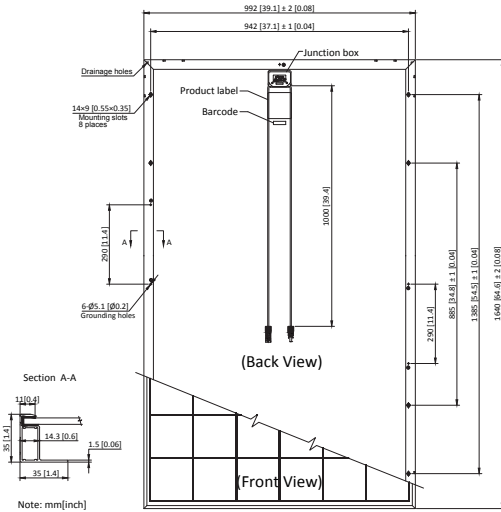

Electrical Characteristics


STC	STP270-20/Wem	STP265-20/Wem	STP260-20/Wem
Maximum Power at STC (Pmax)	270 W	265 W	260 W
Optimum Operating Voltage (Vmp)	31.1 V	31.0 V	30.9 V
Optimum Operating Current (Imp)	8.69 A	8.56 A	8.42 A
Open Circuit Voltage (Voc)	37.9 V	37.8 V	37.7 V
Short Circuit Current (Isc)	9.15 A	9.02 A	8.89 A
Module Efficiency	16.6%	16.3%	16.0%
Operating Module Temperature	-40 °C to +85 °C		
Maximum System Voltage	1000 V DC (IEC)		
Maximum Series Fuse Rating	20 A		
Power Tolerance	0/+5 W		

STC: Irradiance 1000 W/m², module temperature 25 °C, AM=1.5;
 Best in Class AAA solar simulator (IEC 60904-9) used, power measurement uncertainty is within +/- 3%

NOCT	STP270-20/Wem	STP265-20/Wem	STP260-20/Wem
Maximum Power at NOCT (Pmax)	198 W	194 W	191 W
Optimum Operating Voltage (Vmp)	28.4 V	28.3 V	28.2 V
Optimum Operating Current (Imp)	6.97 A	6.86 A	6.76 A
Open Circuit Voltage (Voc)	34.9 V	34.8 V	34.8 V
Short Circuit Current (Isc)	7.42 A	7.32 A	7.19 A


NOCT: Irradiance 800 W/m², ambient temperature 20 °C, AM=1.5, wind speed 1 m/s;
 Best in Class AAA solar simulator (IEC 60904-9) used, power measurement uncertainty is within +/- 3%

Current-Voltage & Power-Voltage Curve (270-20)

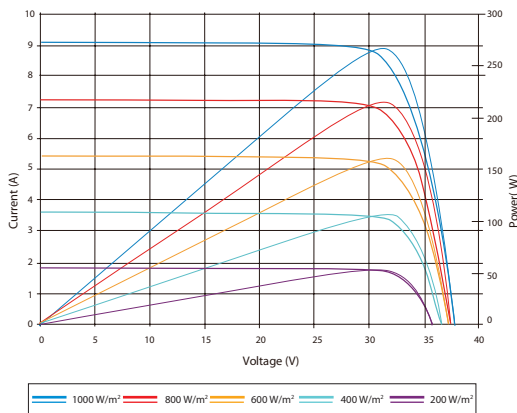

Excellent performance under weak light conditions: at an irradiation intensity of 200 W/m² (AM 1.5, 25 °C), **96.5%** or higher of the STC efficiency (1000 W/m²) is achieved

Dealer information



Temperature Characteristics

Nominal Operating Cell Temperature (NOCT)	45±2°C
Temperature Coefficient of Pmax	-0.41 %/°C
Temperature Coefficient of Voc	-0.33 %/°C
Temperature Coefficient of Isc	0.067 %/°C

Mechanical Characteristics

Solar Cell	Polycrystalline silicon 156 × 156 mm (6 inches)
No. of Cells	60 (6 × 10)
Dimensions	1640 × 992 × 35mm (64.6 × 39.1 × 1.4 inches)
Weight	18.2 kgs (40.1 lbs.)
Front Glass	3.2 mm (0.13 inches) tempered glass
Frame	Anodized aluminium alloy
Junction Box	IP68 rated (3 bypass diodes)
Output Cables	TUV (2Pfg1169:2007) 4.0 mm ² (0.006 inches ²), symmetrical lengths (-) 1000mm (39.4 inches) and (+) 1000 mm (39.4 inches)
Connectors	MC4 compatible

Packing Configuration

Container	20' GP	40' HC
Pieces per pallet	30	30
Pallets per container	6	28
Pieces per container	180	840

Information on how to install and operate this product is available in the installation instruction. All values indicated in this data sheet are subject to change without prior announcement. The specifications may vary slightly. All specifications are in accordance with standard EN 50380. Color differences of the modules relative to the figures as well as discolorations of/in the modules which do not impair their proper functioning are possible and do not constitute a deviation from the specification.

CONFIRMATION OF WARRANTY INSURANCE COVERAGE

Against excessive loss of output of photovoltaic modules

THIS CONFIRMATION OF INSURANCE IS ISSUED AS A MATTER OF INFORMATION ONLY AND DOES NOT AFFIRMATIVELY OR NEGATIVELY AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICY.

Policy Period: Photovoltaic modules sold during the period January 1st, 2016 to December 31st, 2017

We herewith confirm that

Wuxi Suntech Power Co., Ltd.

9 Xinhua Road, Wuxi New District, 214028 Wuxi, Jiangsu, CHINA

(the 'Insured')

has concluded a warranty insurance contract, on behalf of the Insured only, against excessive loss of output of photovoltaic modules sold by the Insured during the policy period (insured photovoltaic modules) as mentioned above.


We herewith confirm that the original cover of the warranty insurance contract (issued by Ping An Property & Casualty Insurance Company of China, Ltd.) is reinsured by Munich Re according to the terms and conditions of the reinsurance agreement.

The period of indemnity shall be 25 years, commencing on the date the invoice for the insured photovoltaic modules is issued. However, the warranty insurance contract does not assume liability for the first 24 months of the period of indemnity (known as the black-out-period).

No person, other than the Insured, whether or not such person has custody of Property Covered, will benefit from this insurance.

This insurance is subject to all terms and conditions in accordance with the insurance policy as issued between the Insurer and Insured. This document is for reference and only the information under Munich Re's GTS Business Suite www.munichre.com/gts is binding.

Date 15 February 2016

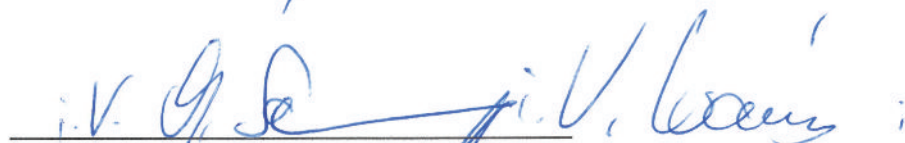Signed by 

Munich Re
Münchener Rückversicherungs-Gesellschaft Aktiengesellschaft in München